

Test Summary KATUN STANDARD LIFE DRUM TEST

Test Designator: **HP LJ-1100**
 DRUM: **KATUN STANDARD LIFE**
 TONER: **KATUN PERFORMANCE**
 PURPOSE: **SYSTEM TEST**
 KATUN DRUM P/N: **35158**

DATE: **3/6/2008**
 TEMP: **23°C**
 RH: **50± 5**
 PRINTER: **HEWLETT PACKARD LJ-1100**
 CARTRIDGE: **OEM - Once Used**

Image Quality

Section Averages	Density	Background	Character Quality	Vertical Res.	Horizontal Res.
OEM N/N	1.50	0.018%	8.2	62.0	55.5
Test N/N	1.43	0.037%	8.5	68.0	61.5


Toner Consumption

Test Section	Toner Consumed (g)	Toner mg/copy	Toner Transferred (g)	%Transfer	%Waste	Waste Toner (g)	Copies per Ctg./Btl.	Copies in Section
OEM N/N	123.4	40.5	113.3	91.8%	8.2%	10.1	3457	3050
Test N/N	106.6	35	90.2	84.6%	15.4%	16.4	4000	3050


OPC Coating Loss

Drum Type	Drum Serial #	Total Copies Run	Coating Thickness at Install	Coating Thickness at End	Total Coating Loss	Loss Per 1K copies	Failure mode
OEM N/N	n/a	3,050	33.5	32.4	1.1	0.361	End of Test
Test N/N	n/a	3,050	33.1	31.7	1.4	0.459	End of Test

Black Page Image Density

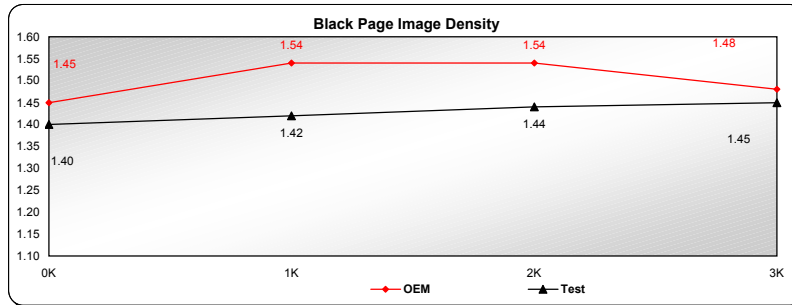

Halftone Reproductions

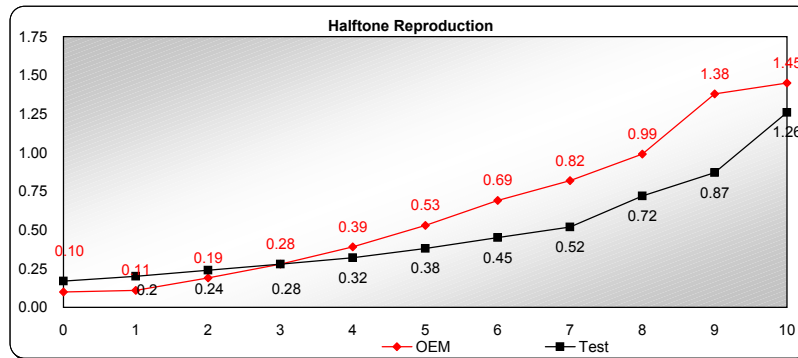

Background

